




## CHARACTERISTICS

Type	Standard	Sensitive M, H, L
Operate Time	7.5 ms. max.	7.5 ms. max.
Operate Bounce	1 ms. typical	0.5 ms. typical
Release Time	3 ms. max.	5 ms. max.
Release Bounce	2.5 ms. typical	3 ms. typical
Insulation Resistance	1000 M	
Dielectric Strength	1000 Vrms, 1 min. between coil and contacts, between adjacent poles 500 Vrms, 1 min. between open contacts	
Surge Strength	1500 V	
Capacitance	2 pf max. between contacts; 0.5 pf max. between adjacent poles; 5 pf max. between coil and contacts	
Shock Resistance	50 g, 11ms.	
Vibration Resistance	10 g, 10 - 70 Hz	
Power Consumption	0.515 - 0.56W	0.15 - 0.36W
Allowable Max. Power Consumption at 20°C	1.02W	
Ambient Temperature	-25°C to 75°C	-25°C to 85°C
Weight	5 g, approx.	

## OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAM (mm)

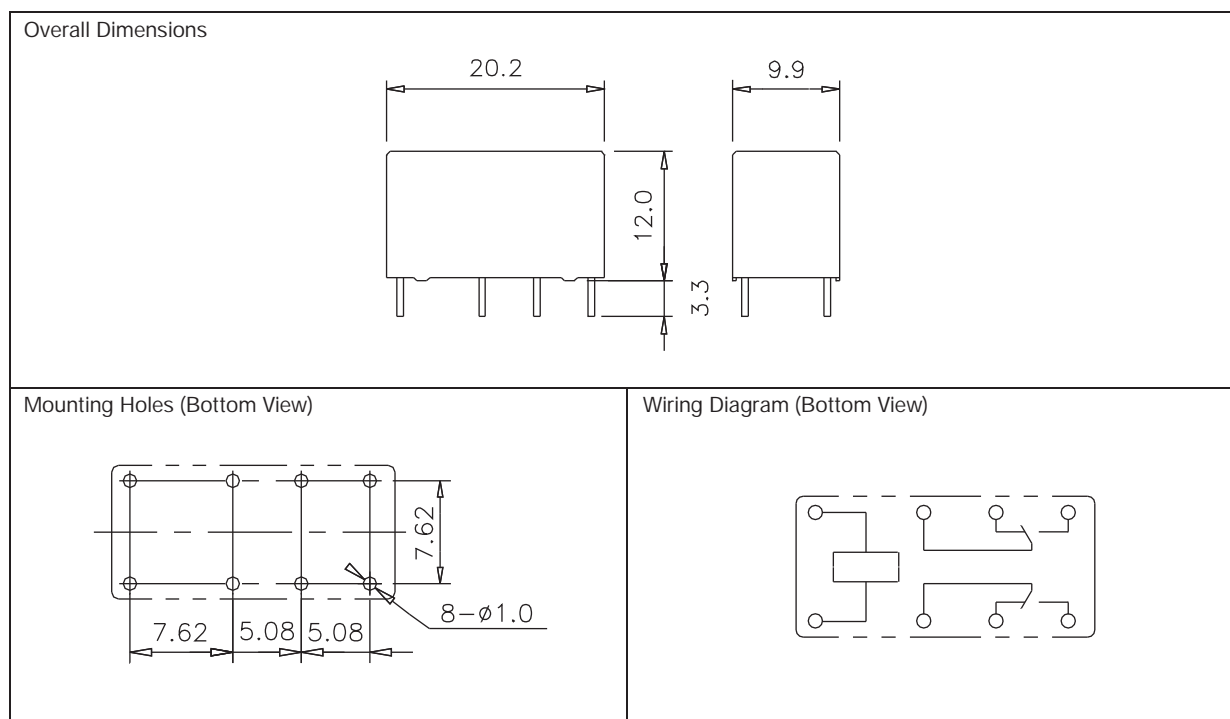

## NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 20°C.
2. Custom-made services available with operational quantity. Please let us know your special requirements.
3. Specifications subject to change without prior notice.

T Y H Enterprise Limited  
 Room 1620B, Nan Fung Centre  
 264-298 Castle Peak Road  
 Tsuen Wan, N.T.  
 Hong Kong  
 Tel: 852-2416-0132  
 Fax: 852-2413-6229  
<http://www.tyhhk.com>  
 email: [info@tyhhk.com](mailto:info@tyhhk.com)

Plant: Shanghai Hi-Gradex Relay Mfg. Co., Ltd.  
 918 Shixin Road  
 Airport Town  
 Pudong New Area  
 Shanghai 201202  
 China  
 Tel: 86-21-6299-5619 / -5877  
 Fax: 86-21-6299-5619  
 email: [tyhesh@online.sh.cn](mailto:tyhesh@online.sh.cn)