

FEATURES

- Low profile, slim design, 12.3 mm in height
- 8A contact capacity
- 1 Form A and 1 Form C contact form for choice
- 5 KV dielectric strength between coil and contacts
- 8 mm creepage distance between coil and contacts
- Sealed and dust cover version available
- UL, CUR and VDE approvals pending

TYPICAL APPLICATIONS

- Home appliances
- Office machine
- Vending machine
- Air conditioner, refrigerator

CONTACT RATING

Form	1 Form A (H), 1 Form C (Z)
Rated Load	8A, 250VAC 5A, 30VDC
Max. Switching Current	10A
Max. Switching Voltage	440VAC/125VDC
Max. Switching Capacity	2000VA/150W

CONTACT DATA

Material		AgCdO
Initial Contact Resistance		100 mΩ max at 1A, 6VDC
Service Life	Mechanical	10 ⁷ ops.
	Electrical	10 ⁵ ops.

UL/CUR/VDE RATING

Form	1 Form A (H), 1 Form C (Z)
Resistive	8A, 250VAC 8A, 24VDC 5A, 30VDC

COIL DATA

Coil Voltage Code	Nominal Voltage (VDC)	Resistance (Ω) ±10%		Must Operate Voltage max. (VDC)	Must Release Voltage min. (VDC)
		Power Consumption			
005	5	113	0.22 - 0.25W	3.75	0.5
006	6	164		4.50	0.6
012	12	617		9.00	1.2
024	24	2350		18.00	2.4
048	48	9600*		36.00	4.8
060	60	12500*		45.00	6.0


CHARACTERISTICS

Operate Time	7 ms.
Release Time	3 ms.
Insulation Resistance	100 MΩ, at 500 VDC, 50%RH
Dielectric Strength	5000 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
Surge Resistance	10000 V
Shock Resistance	10 g, 11ms. functional, 100 g, destructive
Vibration Resistance	20 g / 5 g, 10 - 500 Hz
Ambient Temperature	-40 C to 85 C operating
Weight	8.2 g, approx.


ORDERING DESIGNATION

Example:	HG4518 /	012 -	Z	1	C	F
Model						
Coil Voltage Code						
Contact Form						
H: 1 Form A, 5 mm						
HA: 1 Form A, 3.2 mm						
Z: 1 Form C, 3.2 mm						
Version						
1: Sealed, 2: Dust Cover						
Contact Material						
Nil: AgNi10; G: Gold plated AgNi10						
C: AgCdO; GC: Gold plated AgCdO						
S: AgSnO; GS: Gold plated AgSnO						
Thermal Class						
Nil: UL Class B; F: UL Class F						

REFERENCE CURVES

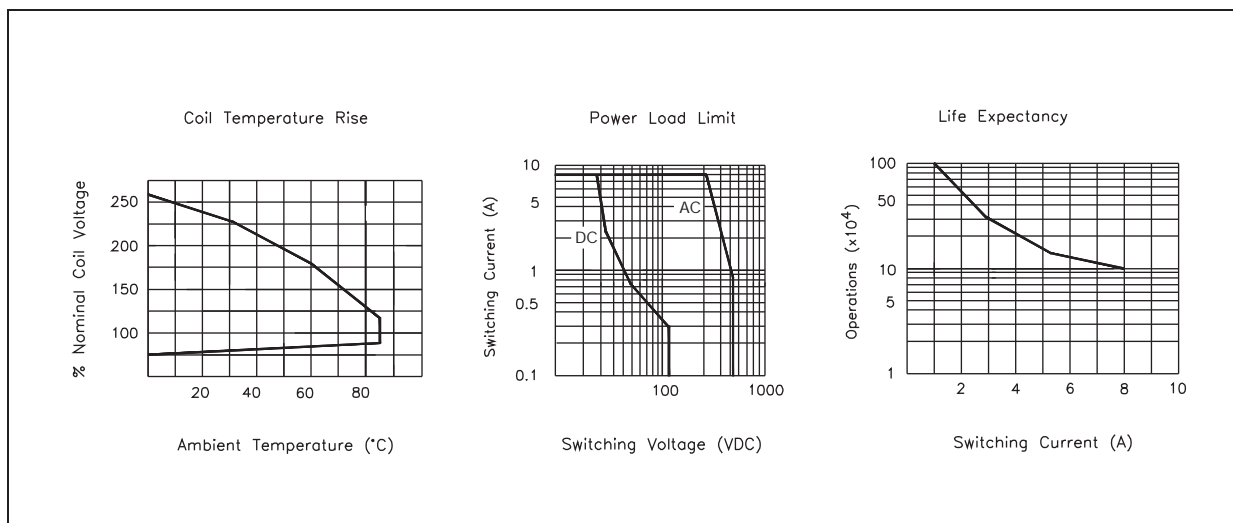

OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

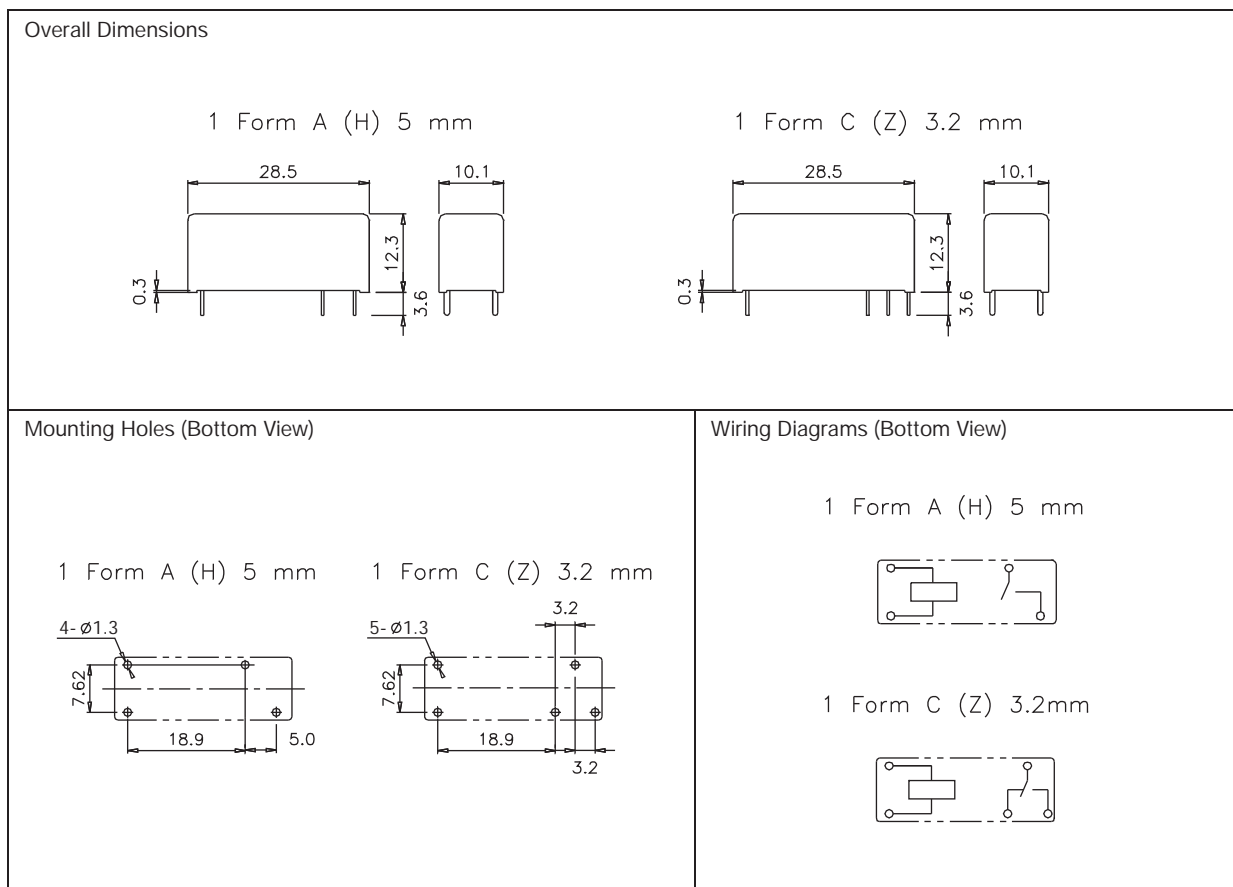

NOTES

- All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
- Coil resistance with * mark is $\pm 15\%$
- Custom-made services available with operational quantity. Please let us know your special requirements.
- Specifications subject to change without prior notice.

T Y H Enterprise Limited
Room 1620B, Nan Fung Centre
264-298 Castle Peak Road
Tsuen Wan, N.T.
Hong Kong
Tel: 852-2416-0132
Fax: 852-2413-6229
<http://www.tyhhk.com>
email: info@tyhhk.com

Plant: Shanghai Hi-Gradex Relay Mfg. Co., Ltd.
918 Shixin Road
Airport Town
Pudong New Area
Shanghai 201202
China
Tel: 86-21-6299-5619 / -5877
Fax: 86-21-6299-5619
email: tyhesh@online.sh.cn